

FT-10 R

Reel

GVWR LBS:

11,500

GAWR LBS:

9,610

WEIGHT LBS:


2,100

CAPACITY LBS:

9,400

- Built Per Customer Specs

- Electric/ Hydraulic Power Up & Down

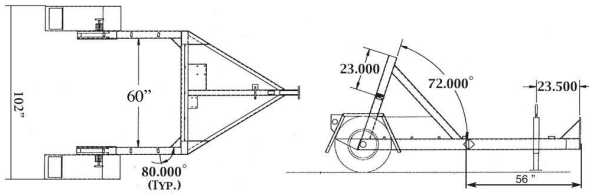

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Reel Capacity	Capacity for a 120" X 60" Reel, 2.25" shaft	X	1.00	Std
Reel Capacity	Reel Diameter at lowest position, 20" Reel	X	1.00	Std
Overall Length	Overall Length	X	12.00	Feet
Width	102" OD, 60" ID	X	1.00	Inches
Brakes	Electric, Dexter FSA (Fwd Self Adj) On All Axles	X	1.00	Std
Axles	10K Oil Bath Hubs	X	1.00	Std
Tires & Wheels	235/75R 17.5 J, 8 Bolt [17.5 x 6.75] Plate Wheel	X	2.00	Each
Hitch Type	3" Adjustable Lunette Eye/Pintle, [C] 25,000 lb, Channel Mount (5/8" Bolt)	X	1.00	Std
Jack	7K Drop Leg ** Top Wind **	X	1.00	Std
Plug	7 Pole RV	X	1.00	Std
Lights	LED Lights (Peterson), Sealed Wiring Harness (Sealco)	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Stripe Color	White	X	1.00	Std
Standard	3/8" Safety Chains, Grade 70	X	1.00	Std
Standard	Conspicuity Tape	X	1.00	Std
Standard	Document Holder	X	1.00	Std
Standard	Elec/Hydraulic Pump with 12 V battery in Lockable Enclosure	X	1.00	Std
GVWR	11,500 lbs	X	1.00	Std