

FT-14 UPT-C

Pole Cargo Trailer

GVWR LBS:

16,100

GAWR LBS:

14,000

WEIGHT LBS:


5,400

CAPACITY LBS:

10,700

- 10" x 6" Receiver Tube
- 3" Crossmembers
- 5" Double Channel Bolsters
- 20' Retracted / 30' Extended Standard
- 24' Retracted / 40' Extended Available

- All Wiring and Air Lines (When Equipped with Air Brakes) are Ran Internally Traveling in a Heavy Duty Energy Chain
- No User Intervention Is Required for the Wiring or Air Lines When Extending and Retracting the Tongue
- Positive Locking Adjustment Pin with Chain Attached to Trailer to Prevent Loss

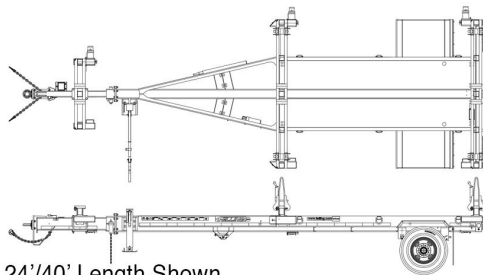

• 24'/40' Length Shown



• Shown with optional toolbox & paint

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Overall Length	20' Retracted to 30' Extended with 10' Cargo Area (Adjustable 20' , 25', 30')	X	20.00	Feet
Width	96" OD / 72" ID Bed	X	1.00	Inches
Cargo Box	Cargo Box with 15" Tall Sides, 10 ga Floor and 12 ga Sides	X	1.00	Std
Rear Gate	Drop Down Rear Tailgate	X	1.00	Std
Appx Deck Height	30" Unloaded Deck Height / 50" Bolster Height	X	1.00	Std
Tie Downs	D-Rings, 5/8"	X	4.00	Std
Brakes	Electric, Dexter FSA (Fwd Self Adj) On All Axles	X	2.00	Std
Axles	7K Dexter, Straight	X	2.00	Std
Axles, Acc	Dexter EZ-Lube Hubs	X	1.00	Std
Suspension	Dexter Spring, 36" Spread	X	1.00	Std
Tires & Wheels	215/75R 17.5 H, 8 Bolt [17.5 x 6.75] Plate Wheel	X	4.00	Each
Hitch Type	2.5" Adjustable Lunette Eye/Pintle, [C] 42,000 lb Plate Mount (5/8" Bolt)	X	1.00	Std
Hitch Type, Acc	Extendable Tongue, 8" x 4" x 1/4" Wall Tube	X	1.00	Std
Jack	12K Drop Leg Spring Foot ** Side Wind **	X	1.00	Std
Plug	7 Pole RV	X	1.00	Std
Lights	LED Lights (Peterson), Sealed Wiring Harness (Sealco)	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Standard	36" Winch Bar	X	1.00	Std
Standard	Front Bolster, 45" Wide Mounted on Extendable Portion of Tongue with Winch Binder and 30' x 4" Strap (Located Curb Side), Does not Include Sliding Lever lock Stanchions	X	1.00	Std
Standard	One Pair of Rubber Wheel Chocks with Holders, Located on Each Side of Trailer	X	1.00	Std
Standard	Center and Rear Bolsters, 95" Wide Bolsters with 21" Sliding Lever Lock Stanchions with Winch Binder and 30' x 4" Strap (Located Curb Side)	X	1.00	Std



FELLING TRAILERS, INC.

1525 Main Street South, Sauk Centre, MN 563
 Phone: 800-245-2809 - www.felling.com

Product Sheet

4500-A

Standard	Tread Plate Fenders	X	1.00	Std
Standard	3/8" Safety Chains, Grade 70	X	1.00	Std
Standard	Document Holder	X	1.00	Std
GVWR	16,100 lbs	X	1.00	Std