

FT-14-2 R

Reel

GVWR LBS:

16,100

GAWR LBS:

14,000

WEIGHT LBS:


2,900

CAPACITY LBS:

13,200

- Built Per Customer Specs

- Electric/ Hydraulic Power Up & Down

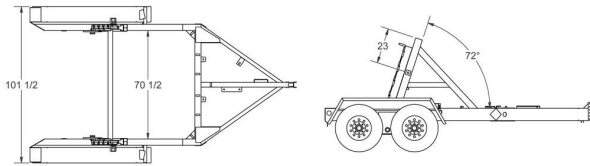

- Shown with optional Hydraulic Power Rewind (self-contained gas engine) and paint.

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Reel Capacity	Capacity for a 120" X 66" Reel, 3" shaft	X	1.00	Std
Reel Capacity	Reel Diameter at lowest position, 70" Reel	X	1.00	Std
Overall Length	Overall Length	X	15.00	Feet
Width	102" OD, 69" ID	X	1.00	Inches
Brakes	Electric, Dexter FSA (Fwd Self Adj) On All Axles	X	1.00	Each
Axles	7K Axle Stubs	X	2.00	Std
Suspension	Walking Beam Greaseable	X	1.00	Std
Tires & Wheels	ST235/80R 16 E, 8 Bolt [16 x 6] White Mod	X	4.00	Std
Hitch Type	2.5" Adjustable Lunette Eye/Pintle, [C] 42,000 lb Plate Mount (5/8" Bolt)	X	1.00	Std
Jack	7K Drop Leg ** Top Wind **	X	1.00	Std
Plug	7 Pole RV	X	1.00	Std
Lights	LED Lights (Peterson), Sealed Wiring Harness (Sealco)	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Stripe Color	White	X	1.00	Std
Standard	3/8" Safety Chains, Grade 70	X	1.00	Std
Standard	Document Holder	X	1.00	Std
Standard	Elec/Hydraulic Pump with 12 V battery in Lockable Enclosure	X	1.00	Std
GVWR	16,100 lbs	X	1.00	Std