

### FT-15 I

### Drop Deck I Series

#### GVWR LBS:

**17,900**

#### GAWR LBS:

**14,400**

#### WEIGHT LBS:


**3,500**

#### CAPACITY LBS:

**14,400**

- 10x15# I-beam Main Frame
- 3" (50K) Jr I-beam crossmembers
- 18" to 20" on center

- Hitch Height Range 17" to 24"

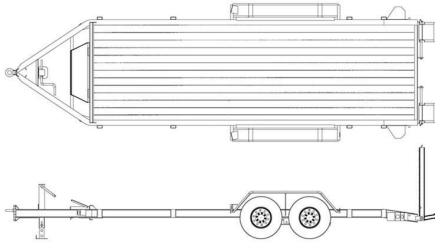

Shown with optional Toolbox & 2' Dovetail.



Shown with optional dovetail

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Frame Type	3" Angle Iron Lip Up	X	1.00	Std
Deck Length	Main Deck Length	X	18.00	Feet
Deck Type	White Oak 2" Nom	X	1.00	Feet
Ramps; Rear	6' x 14.5" Angle Iron Spring Assist	X	1.00	Pair
Appx Deck Height	23" Loaded, 25" Unloaded	X	1.00	Inches
Width	102" OD, 83" ID	X	1.00	Inches
Tie Downs	D-Rings, 5/8"	X	8.00	Std
Brakes	Electric, Dexter FSA (Fwd Self Adj) On All Axles	X	1.00	Std
Axles	7.2K Oil Bath Drop	X	2.00	Std
Suspension	Rubber Torsion, Dexter TorFlex, 42" Spread	X	1.00	Std
Tires & Wheels	215/75R 17.5 H, 8 Bolt [17.5 x 6.75] Plate Wheel (Hercules)	X	4.00	Std
Hitch Length	Center of Coupler to Headboard, Appx	X	5.00	Feet
Hitch Type	2.5" Adjustable Lunette Eye/Pintle, 42,000 lb Plate Mount, Range 18" to 25"	X	1.00	Std
Jack	12K Drop Leg ** Side Wind **	X	1.00	Opt
Plug	7 Pole RV	X	1.00	Std
Lights	LED,4 tail light system, Sealed Wiring Harness	X	1.00	Std
Trailer Color	Black # 16847KXX	X	1.00	Std
Stripe Color	White	X	1.00	Std
Standard	3/8" Safety Chains, Grade 70	X	1.00	Std
Standard	Document Holder	X	1.00	Std