

### FT-16-2 T

### Tilts - Deckover

#### GVWR LBS:

**18,400**

#### GAWR LBS:

**16,000**

#### WEIGHT LBS:


**5,600**

#### CAPACITY LBS:

**12,800**

- 10" I-Beam Main Frame
- 10" Structural Channel Tilt Deck Frame

- 4" I-Beam crossmembers approx 16" to 18" oc
- See Option Page for Stationary Deck

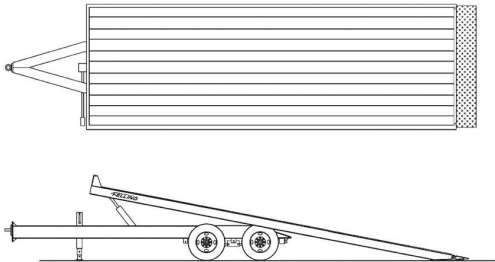

Shown with Optional Winch

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Deck Length	Tilt Deck Length (Includes Approx. 12" Approach Plate)	X	25.00	Feet
Deck Type	White Oak	X	1.00	Std
Appx Deck Height	35" Loaded	X	1.00	Inches
Width	102" OD	X	1.00	Inches
Tie Downs	PLEASE SELECT (D-Rings) 8 Standard-12 W/Stationary	X	1.00	Std
Brakes	Electric, Dexter FSA (Fwd Self Adj) On All Axles	X	1.00	Std
Axles	8K Oil Bath Straight	X	2.00	Std
Suspension	Dexter Spring	X	1.00	Std
Tires & Wheels	215/75R 17.5 H, 8 Bolt [17.5 x 6.75] Plate Wheel	X	4.00	Std
Hitch Length	Center of Coupler to Headboard, Appx	X	5.00	Feet
Hitch Type	2.5" Adjustable Lunette Eye/Pintle, [C] 42,000 lb Plate Mount (5/8" Bolt)	X	1.00	Std
Jack	12K Drop Leg Spring Foot ** Side Wind **	X	1.00	Std
Plug	7 Pole RV	X	1.00	Std
Lights	LED Lights (Peterson), Sealed Wiring Harness (Sealco)	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Stripe Color	White	X	1.00	Std
Standard	2 Steps, 1 on the Standard Hitch and 1 in front of Axles on Roadside	X	2.00	Std
Standard	3/8" Safety Chains, Grade 70	X	1.00	Std
Standard	Document Holder	X	1.00	Std
Standard	Tool Tray	X	1.00	Std
Standard	Single Self Actuating Hydraulic Cushion Cylinder	X	1.00	Std
Standard	Locking Tilt Valve	X	1.00	Std
GVWR	18,400 lbs	X	1.00	Std