

FT-20 I

DD I Series

GVWR LBS:

23,000

GAWR LBS:

20,000


WEIGHT LBS:

4,600

CAPACITY LBS:

18,400

- 10x17# I-beam Main Frame
- 4" (80K) Jr I-beam crossmembers
- 18" on center

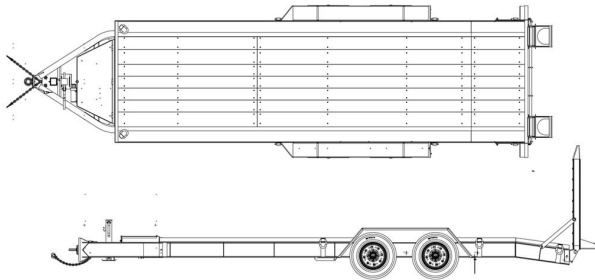

• Shown with optional toolbox, fork pockets, hyd. jack, stake & strap.

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Frame Type	3" Angle Lip Up	X	1.00	Std
Deck Length	Main Deck Length	X	20.00	Feet
Deck Type	White Oak 2" Nom	X	1.00	Std
Ramps; Rear	6' x 16" Angle Iron Spring Assist	X	1.00	Pair
Ramps, Acc	Full width ramp rod	X	1.00	Std
Appx Deck Height	24" Loaded, 26" Unloaded (Torsion)	X	1.00	Inches
Width	102" OD, 82" ID	X	1.00	Inches
Tie Downs	D-Rings, 1" Straight	X	8.00	Std
Brakes	Electric, Dexter FSA (Fwd Self Adj) On All Axles	X	1.00	Std
Axles	10K Dexter Oil Bath	X	2.00	Std
Suspension	Rubber Torsion, Dexter TorFlex, 42" Spread	X	1.00	Std
Tires & Wheels	235/75R 17.5 J, 8 Bolt [17.5 x 6.75] Plate Wheel	X	4.00	Std
Hitch Length	Center of Coupler to Headboard, Appx - Adj Hitch Range 14" to 23" (22" to 27" if Hyd)	X	5.00	Feet
Hitch Type	2.5" Adjustable Lunette Eye/Pintle, [C] 42,000 lb Plate Mount (5/8" Bolt)	X	1.00	Std
Hitch Height	Approximate Adjustment Hitch Range 14" to 23" (22" to 27" if Hyd)	X	1.00	Std
Jack	12K Drop Leg Spring Foot ** Side Wind **	X	1.00	Std
Plug	7 Pole RV	X	1.00	Std
Lights	4 tail light system, LED, Sealed Wiring Harness	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Standard	3/8" Safety Chains, Grade 70	X	1.00	Std
Standard	Document Holder	X	1.00	Std
GVWR	23,000 lbs	X	1.00	Std