

**FT-20 IT-I**

**DD IT-I Series**

**GVWR LBS:**

**23,000**

**GAWR LBS:**

**20,000**

**WEIGHT LBS:**


**5,280**

**CAPACITY LBS:**

**17,720**

- 8x18# I-beam Main Frame
- 4" Jr I-beam crossmembers
- 17" Avg on center
- See Option Page for Stationary Deck

- (2) Cushion Cylinder
- Deck Length = Tilt Angle
- 15' + 5' = 12 Degrees & 16 Degrees

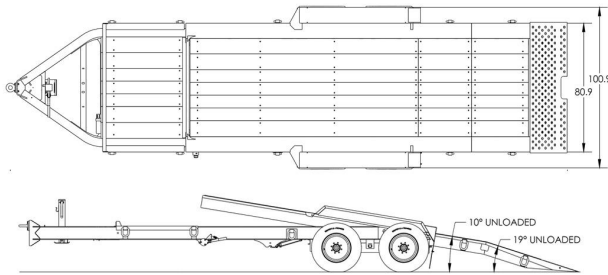

• Shown with opt. fork pockets and white paint

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Stationary Deck	Stationary Deck	X	4.00	Feet
Deck Length	Tilt Deck Length	X	15.00	Feet
Dovetail	5' Length Standard (Includes 2' Steel Punch Plate Approach)	X	5.00	Feet
Deck Type	White Oak 2" Nom	X	1.00	Std
Appx Deck Height	28.5" Loaded, 31" Unloaded (Spring)	X	1.00	Inches
Width	102" OD, 81" ID	X	1.00	Inches
Tie Downs	D-Rings, 1" Straight	X	10.00	Std
Brakes	Electric, Dexter FSA (Fwd Self Adj) On All Axles	X	1.00	Std
Axles	10K Dexter Oil Bath (Single Wheel)	X	2.00	Std
Suspension	Dexter Spring, 42" Spread	X	1.00	Std
Tires & Wheels	235/75R 17.5 J, 8 Bolt [17.5 x 6.75] Plate Wheel	X	4.00	Std
Hitch Length	Center of Coupler to Headboard, Appx	X	5.00	Feet
Hitch Type	2.5" Adjustable Lunette Eye/Pintle, [C] 42,000 lb Plate Mount (5/8" Bolt),	X	1.00	Std
Hitch Height	Approximate Adjustment Hitch Range 19.5" to 28.5"	X	1.00	Std
Jack	12K Drop Leg Spring Foot ** Side Wind **	X	1.00	Std
Plug	7 Pole RV	X	1.00	Std
Lights	LED, 4 tail light system, Sealed Wiring Harness (Tail lights located on rear of fenders)	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Standard	3/8" Safety Chains, Grade 70	X	1.00	Std
Standard	Document Holder	X	1.00	Std
Standard	Dual Cushion Cylinders	X	2.00	Std
GVWR	23,000 lbs	X	1.00	Std