

FT-20-2 PT-C

Pole

GVWR LBS:

23,000

GAWR LBS:

20,000

WEIGHT LBS:


5,900

CAPACITY LBS:

17,100

- 10" x 6" Receiver Tube
- 3" Crossmembers
- 5" Double Channel Bolsters
- 20' Retracted / 30' Extended Standard
- 24' Retracted / 40' Extended Available

- All Wiring and Air Lines (When Equipped with Air Brakes) are Ran Internally Traveling in a Heavy Duty Energy Chain
- No User Intervention Is Required for the Wiring or Air Lines When Extending and Retracting the Tongue
- Positive Locking Adjustment Pin with Chain Attached to Trailer to Prevent Loss

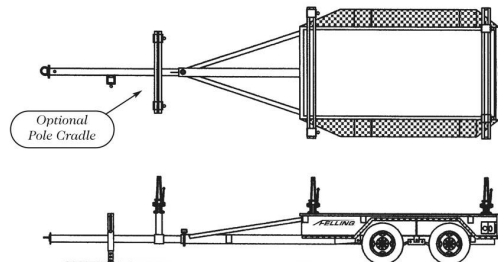

• Shown with optional paint

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Cargo Deck	Cargo Deck Length	X	10.00	Feet
Deck Type	3/16" Smooth Steel	X	1.00	Std
Overall Length	20' Retracted / 30' Extended / 10' Bed	X	20.00	Std
Width	102" OD, 72" ID	X	1.00	Inches
Tie Downs	D-Rings, 5/8" Straight, Mounted in Box Corners	X	4.00	Std
Brakes	Electric, Dexter FSA (Fwd Self Adj) On All Axles	X	1.00	Std
Axles	10K Dexter Oil Bath Single Wheel	X	2.00	Std
Suspension	Dexter Spring	X	1.00	Std
Tires & Wheels	235/75R 17.5 J, 8 Bolt [17.5 x 6.75] Plate Wheel	X	4.00	Std
Hitch Type	2.5" Adjustable Lunette Eye/Pintle, [C] 42,000 lb Plate Mount (5/8" Bolt)	X	1.00	Std
Jack	12K Drop Leg ** Side Wind **	X	1.00	Std
Plug	7 Pole RV	X	1.00	Std
Lights	LED,4 tail light system, Sealed Wiring Harness (Tail lights located in Tailboard)	X	1.00	Std
Lights	All Wiring is Located in the Tongue Traveling in a Heavy Duty Energy Chain No User Intervention is Required of the Wiring when Extending and Retracting the Tongue	X	1.00	Standard
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Stripe Color	White	X	1.00	Std
Standard	3/8" Safety Chains, Grade 70	X	1.00	Std
Standard	36" Winch Bar	X	1.00	Std
Standard	Document Holder	X	1.00	Std
Standard	Tread Plate Fenders	X	1.00	Std
Standard	Front Bolster, Adjustable & Removable, 45" Wide Bolster Mounted on Extended Portion of Tongue, Winch Binder & 4"x30' Strap(Located Curb Side)	X	1.00	Standard



FELLING TRAILERS, INC.

1525 Main Street South, Sauk Centre, MN 563
 Phone: 800-245-2809 - www.felling.com

Product Sheet

4500-A

Standard	Center and Rear Bolsters, 96" Wide Bolsters with 21" Sliding Lever Lock Stanchions with Winch Binder and 30' x 4" Strap (Located Curb Side)	X	1.00	Standard
GVWR	23,000 lbs	X	1.00	Std