


### FT-20-2 T

### Tilts - Deckover

<b>GVWR LBS:</b>	<b>GAWR LBS:</b>	<b>WEIGHT LBS:</b>	<b>CAPACITY LBS:</b>
<b>25,900</b>	<b>20,000</b>	<b>6,400</b>	<b>19,500</b>

- 10" I-Beam Main Frame
- 10" Structural Channel Tilt Deck Frame

- 4" I-Beam crossmembers approx 16" to 18" oc
- See Option Page for Stationary Deck

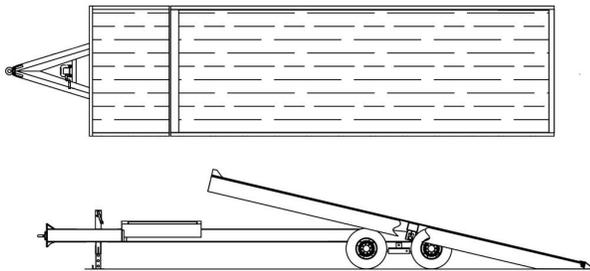

• Shown with optional rubrail with stake pockets and pipe spools.

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Stationary Deck	Stationary Deck	X	4.00	Feet
Deck Length	Tilt Deck Length (Includes Approx. 12" Approach Plate)	X	25.00	Feet
Deck Type	White Oak	X	1.00	Std
Appx Deck Height	35" Loaded	X	1.00	Inches
Width	102" OD	X	1.00	Inches
Tie Downs	D-Rings, Bent, 1" Standard w/ Stationary Deck	X	12.00	Std
Brakes	Electric, Dexter FSA (Fwd Self Adj) On All Axles	X	1.00	Std
Axles	10K Dexter Oil Bath	X	2.00	Std
Suspension	Dexter Spring	X	1.00	Std
Tires & Wheels	ST235/80R 16 E, 8 Bolt [16 x 6] Hub Pilot	X	8.00	Std
Hitch Length	Center of Coupler to Headboard, Appx	X	5.00	Feet
Hitch Type	3" Adjustable Lunette Eye/Pintle, [C] 66,000 lb Plate Mount (3/4" Bolt)	X	1.00	Std
Jack	12K Drop Leg Spring Foot ** Side Wind **	X	1.00	Std
Plug	7 Pole RV	X	1.00	Std
Lights	LED Lights (Peterson), Sealed Wiring Harness (Sealco)	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Stripe Color	White	X	1.00	Std
Standard	2 Steps, 1 on the Standard Hitch and 1 in front of Axles on Roadside	X	2.00	Std
Standard	3/8" Safety Chains, Grade 70	X	1.00	Std
Standard	Document Holder	X	1.00	Std
Standard	Tool Box, with Lockable Cover	X	1.00	Std
Standard	Single Self Actuating Hydraulic Cushion Cylinder	X	1.00	Std
Standard	Locking Tilt Valve	X	1.00	Std



**FELLING TRAILERS, INC.**

1525 Main Street South, Sauk Centre, MN 563  
Phone: 800-245-2809 - [www.felling.com](http://www.felling.com)

*Product Sheet*

4500-A

GVWR 25,900 lbs

X 1.00 Std

---