


### FT-24 I-S DS

### DD I Drill Series

GVWR LBS:	GAWR LBS:	WEIGHT LBS:	CAPACITY LBS:
<b>25,980</b>	<b>24,000</b>	<b>5,300</b>	<b>20,680</b>
<ul style="list-style-type: none"> <li>• 8x18# I-beam Main Frame</li> <li>• 4" (80K) Jr I-beam crossmembers</li> <li>• 18" on center</li> </ul>		<ul style="list-style-type: none"> <li>• 18" on center</li> <li>• 42" Axle spread</li> <li>• Hitch Height Range 21" to 30"</li> </ul>	

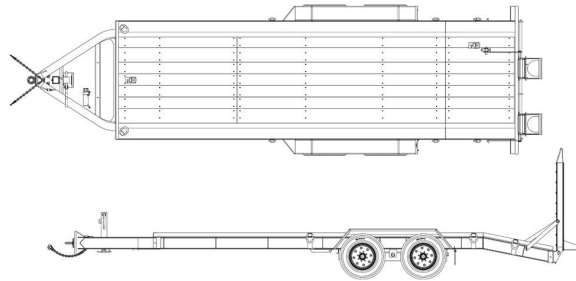

• Shown with optional large toolbox

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Frame Type	3" Angle Iron Lip Up	X	1.00	Std
Deck Length	Main Deck Length	X	19.00	Feet
Dovetail	Dovetail Length - Wood Inlay	X	4.00	Feet
Deck Type	White Oak 2" Nom	X	1.00	Std
Ramps; Rear	6' x 16" Angle Iron Spring Assist	X	1.00	Pair
Ramps, Acc	Mount Ramps to Road Side with Hold-Up Anchor in Floor and Full Width Ramp Rod	X	1.00	Std
Appx Deck Height	28" Loaded, 30" Unloaded (Spring)	X	1.00	Std
Width	102" OD, 82" ID	X	1.00	Inches
Tie Downs	D-Rings, 1" Straight (2) 45° top of deck in corners, (2) front of fenders, (2) rear of deck, (2) 1/2 way on BVT - 5/8" (1) cent. on front of deck, (1) offset on BVT deck	X	10.00	Std
Brakes	Electric, Dexter FSA (Fwd Self Adj) On All Axles	X	1.00	Std
Axles	12K Dexter Oil Bath (Single Wheel)	X	2.00	Std
Suspension	Dexter Spring, 42" Spread	X	1.00	Std
Tires & Wheels	235/75R 17.5 J, 8 Bolt [17.5 x 6.75] Plate Wheel	X	4.00	Std
Hitch Length	Center of Coupler to Headboard	X	5.00	Feet
Hitch Type	3" Adjustable Lunette Eye/Pintle, [C] 50,000 lb Plate Mount (5/8" Bolt)	X	1.00	Std
Hitch Height	Approximate Adjustment Hitch Range 19" to 28" (26" to 30" if Hyd)	X	1.00	Std
Jack	12K Drop Leg, Side Wind	X	1.00	Std
Plug	7 Pole RV	X	1.00	Std
Lights	LED,4 tail light system, Sealed Wiring Harness	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Standard	1/2" Safety Chains, Grade 70	X	1.00	Std
Standard	Document Holder	X	1.00	Std



**FELLING TRAILERS, INC.**

1525 Main Street South, Sauk Centre, MN 563  
Phone: 800-245-2809 - www.felling.com

*Product Sheet*

4500-A

Standard	Drill Kit Ready - Steel Mounting Strips Under Deck To Mount Tank	X	1.00	Std
GVWR	25,980 lbs	X	1.00	Std