

FT-24 I

DD I Series

GVWR LBS:

25,980

GAWR LBS:

24,000

WEIGHT LBS:


4,900

CAPACITY LBS:

21,080

- 10x17# I-beam Main Frame
- 4" (80K) Jr I-beam crossmembers
- 18" on center

- 18" on center
- 42" Axle spread

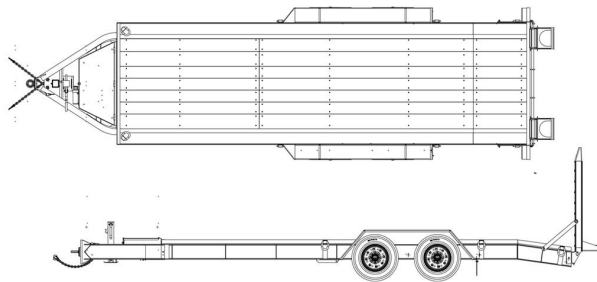

• Shown with optional toolbox, fork pockets, hyd. jack, stake & strap.

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Frame Type	3" Angle Iron Lip Up	X	1.00	Std
Deck Length	Main Deck Length	X	20.00	Feet
Deck Type	White Oak 2" Nom	X	1.00	Std
Ramps, Acc	Full width ramp rod	X	1.00	Std
Ramps; Rear	6' x 16" Angle Iron Spring Assist	X	1.00	Pair
Appx Deck Height	24" Loaded, 26" Unloaded (Torsion)	X	1.00	Std
Width	102" OD, 82" ID	X	1.00	Inches
Tie Downs	D-Rings, 1" Straight	X	8.00	Std
Brakes	Electric, Dexter FSA (Fwd Self Adj) On All Axles	X	1.00	Std
Axles	12K Dexter Oil Bath	X	2.00	Std
Suspension	Rubber Torsion, Dexter TorFlex, 42" Spread	X	1.00	Std
Tires & Wheels	235/75R 17.5 J, 8 Bolt [17.5 x 6.75] Plate Wheel	X	4.00	Std
Hitch Length	Center of Coupler to Headboard	X	5.00	Feet
Hitch Type	3" Adjustable Lunette Eye/Pintle, [C] 50,000 lb Plate Mount (5/8" Bolt)	X	1.00	Std
Hitch Height	Approximate Adjustment Hitch Range 14" to 23" (22" to 27" if Hyd)	X	1.00	Std
Jack	12K Drop Leg Spring Foot ** Side Wind **	X	1.00	Std
Plug	7 Pole RV	X	1.00	Std
Lights	LED,4 tail light system, Sealed Wiring Harness	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Standard	1/2" Safety Chains, Grade 70	X	1.00	Std
Standard	Document Holder	X	1.00	Std
GVWR	25,980 lbs	X	1.00	Std