

FT-24 TS

Sprayer

GVWR LBS:

30,600

GAWR LBS:

24,000



WEIGHT LBS:

6,600

CAPACITY LBS:

24,000

- Built Per Customer Specs

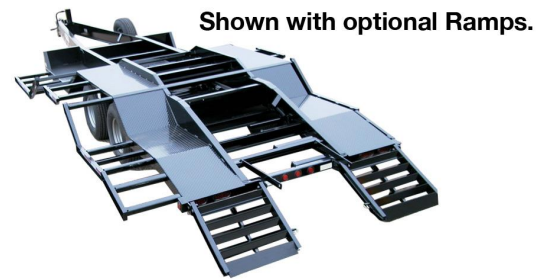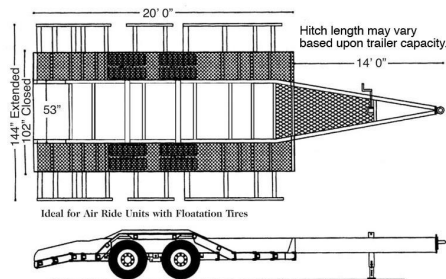

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Deck Length	Main Deck Length	X	20.00	Feet
Beavertail	30" Length	X	2.50	Feet
Deck Type	21" Wheel Troughs with 53" Open Center	X	1.00	Std
Ramps, Acc	None	X	1.00	Std
Width	102" OD, 53" ID	X	1.00	Inches
Tie Downs	Tie Loops	X	4.00	Std
Brakes	Electric, Dexter FSA (Fwd Self Adj) On All Axles	X	1.00	Std
Axles	12K Dexter Oil Bath	X	2.00	Std
Suspension	Dexter Spring	X	1.00	Std
Tires & Wheels	ST235/80R 16 E, 8 Bolt [16 x 6] Hub Pilot	X	8.00	Std
Hitch Length	Center of Coupler to Headboard, Appx	X	15.00	Feet
Hitch Type	2.5" Adjustable Lunette Eye/Pintle, [C] 42,000 lb Plate Mount (5/8" Bolt)	X	1.00	Std
Hitch Type, Acc	Mesh in Center of Tongue	X	1.00	Std
Jack	12K Drop Leg ** Side Wind **	X	1.00	Std
Plug	7 Pole RV	X	1.00	Std
Lights	LED Lights (Peterson), Sealed Wiring Harness (Sealco)	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Stripe Color	White	X	1.00	Std
Standard	1/2" Safety Chains, Grade 70	X	1.00	Std
Standard	Document Holder	X	1.00	Std
Standard	Unit Comes Standard with Telescopic Sides for a Total of 144" OD	X	1.00	Std
GVWR	30,600 lbs	X	1.00	Std