

FT-3 R

Reel

GVWR LBS:

2,990

GAWR LBS:

3,000

WEIGHT LBS:


1,100

CAPACITY LBS:

1,890

- Built Per Customer Specs
- 4" X 3" X 3/16" tube uprights

- Electric/ Hydraulic Power Up & Down

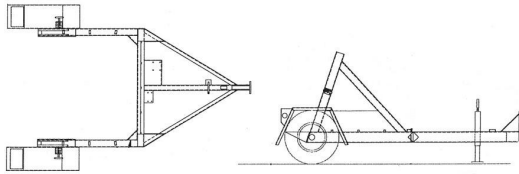

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Reel Capacity	Capacity for a 72" X 70" Reel, 2.25" shaft	X	1.00	Inches
Reel Capacity	Reel Diameter at lowest position, 20" Reel	X	1.00	Std
Overall Length	Overall Length	X	11.00	Feet
Width	102" OD, 70" ID	X	1.00	Inches
Brakes	No Brakes	X	1.00	Std
Axles	3.5K Stub Axles	X	1.00	Std
Tires & Wheels	ST225/75R 15 E, 5 Bolt [15 x 6] White Mod	X	2.00	Std
Hitch Type	3" Adjustable Lunette Eye/Pintle, [C] 25,000 lb, Channel Mount (5/8" Bolt)	X	1.00	Std
Jack	7K Drop Leg ** Top Wind **	X	1.00	Std
Plug	7 Pole RV	X	1.00	Std
Lights	LED Lights (Peterson), Sealed Wiring Harness (Sealco)	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Stripe Color	White	X	1.00	Std
Standard	3/8" Safety Chains, Grade 70	X	1.00	Std
Standard	Elec/Hydraulic Pump with 12 V battery in Lockable Enclosure	X	1.00	Std
GVWR	2,990 lbs	X	1.00	Std