

### FT-30 UPT

### Pole Trailer

#### GVWR LBS:

**34,500**

#### GAWR LBS:

**30,000**

#### WEIGHT LBS:


**4,550**

#### CAPACITY LBS:

**29,950**

- 10" x 6" Receiver Tube
- 12ga Steel Floor with Drainage Perforations
- 3" Crossmembers
- 5" Double Channel Bolsters
- 24' Retracted / 40' Extended Standard
- 29' Retracted / 46' Extended Available

- All Wiring and Air Lines (When Equipped with Air Brakes) are Ran Internally Traveling in a Heavy Duty Energy Chain
- No User Intervention Is Required for the Wiring or Air Lines When Extending and Retracting the Tongue
- Positive Locking Adjustment Pin with Chain Attached to Trailer to Prevent Loss

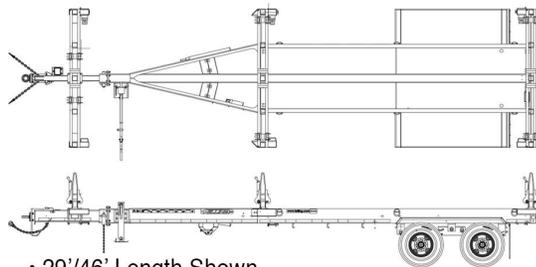

• 29' / 46' Length Shown



• Shown with optional Vivid White paint, 60" wide front bolster with sliding lever lock stanchions, & dual 12K jacks.

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Overall Length	24' Retracted to 40' Extended with 11' Cargo Area	X	24.00	Feet
Width	95" OD	X	1.00	Inches
Tie Downs	D-Rings, 5/8"	X	6.00	Std
Brakes	Electric, Dexter FSA (Fwd Self Adj) On All Axles	X	1.00	Std
Axles	15K Dexter Oil Bath	X	2.00	Std
Suspension	Dexter Spring	X	1.00	Std
Tires & Wheels	215/75R 17.5 H, 8 Bolt [17.5 x 6.75] Hub Pilot	X	8.00	Std
Hitch Type	3" Adjustable Lunette Eye/Pintle, [C] 50,000 lb Plate Mount (5/8" Bolt)	X	1.00	Std
Hitch Type, Acc	Extendable Tongue, 8" x 4" x 1/4" Wall Tube	X	1.00	Std
Jack	12K Drop Leg Spring Foot ** Side Wind **	X	1.00	Std
Plug	7 Pole RV	X	1.00	Std
Lights	LED Lights (Peterson), Sealed Wiring Harness (Sealco)	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Standard	One Pair of Rubber Wheel Chocks with Holders, Located on Each Side of Trailer	X	1.00	Std
Standard	36" Winch Bar	X	1.00	Std
Standard	Front Bolster, 45" Wide Mounted on Extendable Portion of Tongue with Winch Binder and 30' x 4" Strap (Located Curb Side), Does not Include Sliding Lever lock Stanchions	X	1.00	Std
Standard	Center and Rear Bolsters, 95" Wide Bolsters with 21" Sliding Lever Lock Stanchions with Winch Binder and 30' x 4" Strap (Located Curb Side)	X	1.00	Std
Standard	Tread Plate Fenders	X	1.00	Std
Standard	1/2" Safety Chains, Grade 70	X	1.00	Std
Standard	Document Holder	X	1.00	Std
GVWR	34,500 lbs	X	1.00	Std