

### FT-45-2 LP Drill Series

### Deckover LP Drill Series

#### GVWR LBS:

**53,900**

#### GAWR LBS:

**45,000**

#### WEIGHT LBS:

**8,900**


#### CAPACITY LBS:

**45,000**

- Engineered, Cambered, Fabricated 14" Main Beams
- 4" pierced High Tensile Jr I-Beam crossmembers 16" o center
- Heavy Duty 3 Leaf Springs

- 7" channel side rails, flat side out
- Tread Plate covered wheels
- Reinforced Ramps

\* NOTE: Dealer must add 12% FET on retail price. Tax is to be calculated & remitted by dealer.

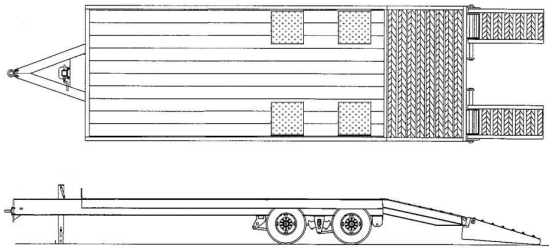

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Deck Length	Main Deck Length (Pierced Frame)	X	20.00	Feet
Frame Type	Engineered Fabricated Hi-Tensile Grade 80 Main Frame Beams with Grade 80 Jr-I Cross-Members	X	1.00	Std
Beavertail	Self Cleaning 5" x 3" Angle Iron Beavertail	X	6.00	Feet
Beavertail, Acc	Double Incline	X	1.00	Std
Deck Type	White Oak 2" Nom	X	1.00	Std
Ramps; Rear	6' x 20" Self Cleaning 5" X 3" Angle Iron, Spring Assist	X	1.00	Pair
Appx Deck Height	33" Loaded, 35" Unloaded	X	1.00	Inches
Width	102" OD	X	1.00	Inches
Tie Downs	D-Rings, 1" ** Straight ** (One Set Centered on BVT)	X	14.00	Each
Brakes	Air, ABS 2S/1M, Meritor WABCO (Parking brakes on all axles)	X	1.00	Std
Axles	25K Oil Bath	X	2.00	Std
Suspension	25,000 lb Heavy Duty 3 Leaf Springs	X	1.00	Std
Suspension	49" Spread (Spring), 9700 Hutch	X	1.00	Std
Tires & Wheels	235/75R 17.5 J, 8 Bolt [17.5 x 6.75] Hub Pilot	X	8.00	Each
Hitch Length	Center of Coupler to Headboard, Appx	X	6.30	Feet
Hitch Type	3" Adjustable Lunette Eye/Pintle, [C] 66,000 lb Plate Mount (3/4" Bolt)	X	1.00	Std
Jack	140,000 lb Twin 2 Speed (39,000 lb Lift Capacity)	X	1.00	Pair
Plug	7 Pole Semi	X	1.00	Std
Lights	LED Lights (Peterson), Sealed Wiring Harness (Sealco)	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Stripe Color	White	X	1.00	Std
Standard	1/2" Safety Chains, Grade 70	X	1.00	Std



**FELLING TRAILERS, INC.**

1525 Main Street South, Sauk Centre, MN 563  
 Phone: 800-245-2809 - www.felling.com

*Product Sheet*

4500-A

Standard	2 Steps, 1 on the Standard Hitch and 1 in front of Axles on Roadside	X	2.00	Std
Standard	Document Holder	X	1.00	Std
Standard	Toolbox, Extended as far forward as possible (with paddle latch) in a-frame area of hitch	X	1.00	Std
GVWR	53,900 lbs	X	1.00	Std