


### FT-50-2 RGT-L

### Tilts - RG Deckover

<b>GVWR LBS:</b>	<b>GAWR LBS:</b>	<b>WEIGHT LBS:</b>	<b>CAPACITY LBS:</b>
<b>64,300</b>	<b>45,000</b>	<b>14,300</b>	<b>50,000</b>

- Manufactured Beam Main Frame
- 12" Channel Tilt Deck Frame
- Greasable deck pivot points

- 4" I-Beam crossmembers approx 18" oc
- Not Canada Legal axle width and overhang
- \* NOTE: Dealer must add 12% FET on retail price. Tax is to be calculated & remitted by dealer.

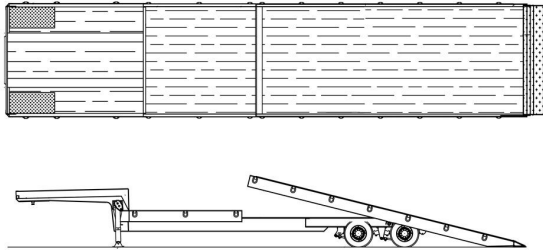

Shown with optional rub rail & stake pockets with double pipe spools, grouser bars & more

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Load Capacity	50,000 lbs Distributed	X	1.00	Std
Upper Deck	90° Neck	X	10.00	Feet
Stationary Deck	Stationary Deck	X	4.00	Feet
Deck Length	Tilt Deck Length (Includes Approx. 12" Approach Plate)	X	25.00	Feet
Deck Type	White Oak, Full Length	X	1.00	Std
Appx Deck Height	36" Loaded	X	1.00	Inches
Width	102" OD	X	1.00	Inches
Tie Downs	D-Rings, 1" ** Bent **	X	14.00	Each
Brakes	Air, ABS 2S/1M, Meritor WABCO (Parking brakes on all axles)	X	1.00	Std
Axles	25K Oil Bath	X	2.00	Std
Suspension	25,000 lb Heavy Duty 3 leaf springs, for Hutch 9700	X	2.00	Std
Suspension	49" Spread (Spring), 9700 Hutch	X	1.00	Std
Tires & Wheels	235/75R 17.5 J, 8 Bolt [17.5 x 6.75] Hub Pilot	X	8.00	Each
Hitch Type	Semi King Pin [S] with 18" Setback, 48" Height	X	1.00	Std
Jack	200,000# Twin 2 Speed, Holland Mark V (62,500 lb Lift Capacity)	X	1.00	Std
Plug	7 Pole Semi Socket	X	1.00	Std
Lights	LED Lights (Peterson), (3) lights per side, (2) per side Tailboard, Sealed Wiring Harness (Sealco)	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Stripe Color	White	X	1.00	Std
Standard	Chain Boxes in Front Corners of Upper Deck, Lockable	X	2.00	Each
Standard	Document Holder	X	1.00	Std
Standard	Air bag assist tilt (up only)	X	1.00	Std



**FELLING TRAILERS, INC.**

1525 Main Street South, Sauk Centre, MN 563  
Phone: 800-245-2809; FAX: 320-352-5230

*Product Sheet*

4500-A

[www.felling.com](http://www.felling.com)

Standard	Air Operated Lock Mechanism	X	1.00	Std
Standard	Locking Tilt Valve	X	1.00	Std
GVWR	64,300 lbs	X	1.00	Std