

FT-6 DT

Dump Trailers

GVWR LBS:

7,000

GAWR LBS:

6,000


WEIGHT LBS:

2,500

CAPACITY LBS:

4,500

- 10 ga. steel floor
- 20" high 12 ga. sides with stake pockets
- Single hydraulic cylinder

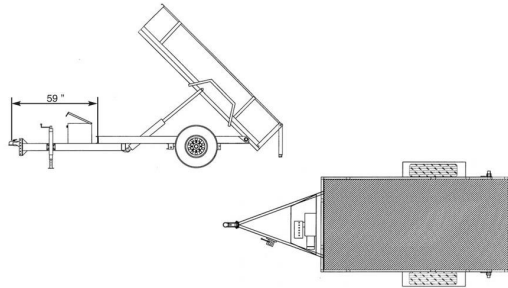

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Deck Length	Main Deck Length	X	8.00	Feet
Deck Type	10 Gauge Steel w/ 20" High 12 Gauge Sides	X	1.00	Std
Appx Deck Height	21" Loaded	X	1.00	Inches
Width	80" OD, 60" ID	X	1.00	Inches
Tie Downs	Stake Pockets (3 on each side 2 in front)	X	8.00	Std
Brakes	Electric, Dexter FSA (Fwd Self Adj) On All Axles	X	1.00	Std
Axles	6K Dexter, Drop	X	1.00	Std
Suspension	Dexter Spring	X	1.00	Std
Tires & Wheels	ST235/80R 16 E, 8 Bolt [16 x 6] White Mod	X	2.00	Std
Hitch Length	Center of Coupler to Headboard, Appx	X	5.00	Feet
Hitch Type	2 5/16" Ball Adjustable, [B] 20,000 lb Channel Mount	X	1.00	Std
Jack	7K Drop Leg ** Top Wind **	X	1.00	Std
Plug	7 Pole RV	X	1.00	Std
Lights	LED Lights (Peterson), Sealed Wiring Harness (Sealco)	X	1.00	Std
Rear Gate	Double Acting Spreader Gate	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Stripe Color	None	X	1.00	Std
Standard	3/8" Safety Chains, Grade 70	X	1.00	Std
Standard	Heavy Duty Battery, Pump and Remote with 15ft Cord	X	1.00	Std
Standard	Single Hydraulic Cylinder	X	1.00	Each
Standard	Tread Plate Fenders	X	1.00	Std
GVWR	7,000 lbs	X	1.00	Std