


### FT-70-2 MX-H

### Semi - MX Series

|                  |                  |                    |                      |
|------------------|------------------|--------------------|----------------------|
| <b>GVWR LBS:</b> | <b>GAWR LBS:</b> | <b>WEIGHT LBS:</b> | <b>CAPACITY LBS:</b> |
| <b>82,500</b>    | <b>40,560</b>    | <b>12,500</b>      | <b>70,000</b>        |

- Swing Clearance is 84" Standard
- 48" King Pin height
- 59" Upper Deck height
- 18" King Pin set back
- Engineered, Cambered, Fabricated Main Beams
- Ready for a 48" Chain Box on both sides, located behind dollies

- 8" Structural channel side rails
  - Pierced 6" Jr I-Beam crossmembers on 16" centers
  - Tread Plate covered wheels
  - Mid-Ship Turn/Marker Lights
- \* NOTE: Dealer must add 12% FET on retail price. Tax is to be calculated & remitted by dealer.

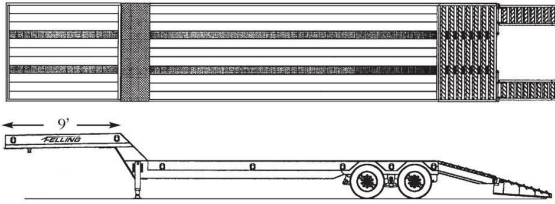

Shown with Optional 45° 9' Upper Deck



Shown with optional Air Ramps, 10' 2" axle spread and paint

| Standard & Other Options | Description   | Std. Option | Std. Qty. | Unit   |
|--------------------------|---|-------------|-----------|--------|
| Load Capacity            | 70,000 lbs Distributed, 45,000 in 10 ft, 41,500 lbs in 4 ft   | X           | 1.00      | Std    |
| Upper Deck               | 90° Neck  | X           | 10.00     | Std    |
| Deck Length              | Main Deck Length  | X           | 28.00     | Feet   |
| Frame Type               | Channel Side Rails turned In  | X           | 1.00      | Std    |
| Beavertail               | Self Cleaning 5" x 3" Angle Iron Beavertail   | X           | 5.00      | Feet   |
| Deck Type                | 6" Jr I-Beam Crossmembers, 16" on Center  | X           | 1.00      | Std    |
| Deck Type                | White Oak 2" Nom  | X           | 1.00      | Std    |
| Ramps; Rear              | 5' x 20" Self Cleaning 5" X 3" Angle Iron, Spring Assisted  | X           | 1.00      | Pair   |
| Appx Deck Height         | 59" Upper Deck, 41" Main Deck, Loaded   | X           | 1.00      | Inches |
| Width                    | 102" OD   | X           | 1.00      | Inches |
| Tie Downs                | D-Rings, 1" *** Straight **   | X           | 16.00     | Std    |
| Brakes                   | Air, ABS 2S/1M, Meritor WABCO (Parking brakes on all axles)   | X           | 1.00      | Std    |
| Axles                    | 25K Oil Bath  | X           | 2.00      | Std    |
| Suspension               | 49" Spread (Spring), 9700 Hutch   | X           | 1.00      | Std    |
| Tires & Wheels           | 255/70R 22.5 H, 10 Bolt [22.5 x 8.25] Hub Pilot   | X           | 8.00      | Each   |
| Hitch Type               | Semi King Pin [S] with 18" Setback, 48" Height  | X           | 1.00      | Std    |
| Jack                     | 200,000# Twin 2 Speed, Holland Mark V (62,500 lb Lift Capacity)   | X           | 1.00      | Std    |
| Plug                     | 7 Pole Semi Socket  | X           | 1.00      | Std    |
| Lights                   | LED Lights (Peterson), (3) lights per side Deck, (3) per side Tailboard, Sealed Wiring Harness (Sealco) | X           | 1.00      | Std    |
| Trailer Color            | Felling Black # CCA945378 (White Felling Decal)   | X           | 1.00      | Std    |
| Stripe Color             | White   | X           | 1.00      | Std    |
| Standard                 | Document Holder   | X           | 1.00      | Std    |



**FELLING TRAILERS, INC.**

1525 Main Street South, Sauk Centre, MN 563  
Phone: 800-245-2809; FAX: 320-352-5230

*Product Sheet*

4500-A

[www.felling.com](http://www.felling.com)

|          |   |   |      |     |
|----------|---|---|------|-----|
| Standard | Ready for a 48" Chain Box on both sides, located behind dollies | X | 1.00 | Std |
| Standard | 1 step standard in front of the first axle on drivers side      | X | 1.00 | Std |
| Standard | Toolbox with Cover Recessed in Upper Deck                       | X | 1.00 | Std |
| GVWR     | 82,500 lbs  | X | 1.00 | Std |