


FT-70-2 NN-HX

Semi - Narrow Neck

GVWR LBS:	GAWR LBS:	WEIGHT LBS:	CAPACITY LBS:
84,000	40,560	14,000	70,000

- Swing Clearance is 84" Standard
- 48" King Pin height
- 18" King Pin set back
- Engineered, Cambered, Fabricated Main Beams

- 8" Structural channel side rails
 - Pierced 6" I-Beam crossmembers on 16" centers
 - Open Wheel Wells
 - Mid-Ship Turn/Marker Lights
- * NOTE: Dealer must add 12% FET on retail price. Tax is to be calculated & remitted by dealer.

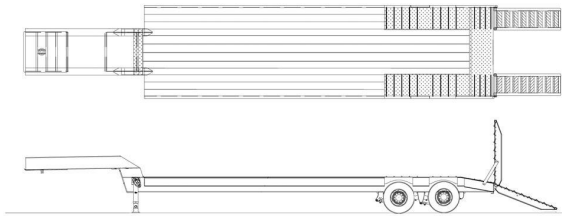

Shown with optional Motorgrader Ramps

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Load Capacity	70,000 lbs Distributed, 52,500 lbs in 16 ft	X	1.00	Std
Gooseneck	Narrow Neck Design, 84" Swing Clearance	X	11.00	Feet
Deck Length	Main Deck Length (with 7' open wheels)	X	25.00	Feet
Frame Type	Channel Side Rails turned out	X	1.00	Std
Beavertail	Self Cleaning Angle Iron	X	3.00	Feet
Deck Type	6" Jr I-Beam Crossmembers, 16" on Center	X	1.00	Std
Deck Type	White Oak 2" Nom	X	1.00	Std
Ramps; Rear	24" x 72" Stand Up Self Cleaning W/Spring Assist	X	1.00	Pair
Appx Deck Height	38" Loaded, 40" Unloaded (Open Wheels)	X	1.00	Inches
Width	102" OD	X	1.00	Inches
Tie Downs	D-Rings, 1" ** Bent **	X	14.00	Each
Brakes	Air, ABS 2S/1M, Meritor WABCO	X	1.00	Std
Axles	25K Meritor Oil Bath	X	2.00	Std
Suspension	49" Spread, 9700 Hutch	X	1.00	Std
Tires & Wheels	255/70R 22.5 H, 10 Bolt [22.5 x 8.25] Hub Pilot (Hercules)	X	8.00	Std
Hitch Type	Semi King Pin with 18" Setback, 48" Height	X	1.00	Std
Jack	200,000# Twin 2 Speed, Holland Mark V (62,500 lb Lift Capacity)	X	1.00	Std
Plug	7 Pole Semi Socket	X	1.00	Std
Lights	LED Lights (Peterson), Sealed Wiring Harness (Sealco)	X	1.00	Std
Trailer Color	Black	X	1.00	Std
Stripe Color	White	X	1.00	Std
Standard	Document Holder	X	1.00	Std
Standard	1 step standard in front of the first axle on drivers side	X	1.00	Std

Prices subject to change without notice