


FT-80-3 MX-L

Semi - MX Series

GVWR LBS:	GAWR LBS:	WEIGHT LBS:	CAPACITY LBS:
95,900	67,500	15,900	80,000

- Swing Clearance is 84" Standard
- 48" King Pin height
- 59" Upper Deck height
- 18" King Pin set back
- Engineered, Cambered, Fabricated Main Beams
- Ready for a 48" Chain Box on both sides, located behind dollies

- 8" Structural channel side rails
 - Pierced 6" Jr I-Beam crossmembers on 16" centers
 - Tread Plate covered wheels
 - Mid-Ship Turn/Marker Lights
- * NOTE: Dealer must add 12% FET on retail price. Tax is to be calculated & remitted by dealer.

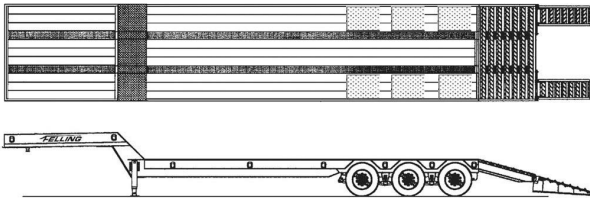

Shown with Optional 45° 9' Upper Deck



Shown with optional hydraulic bi-fold ramps inlaid with rubber.

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Load Capacity	80,000 lbs Distributed, 52,000 lbs in 10 ft, 50,000 lbs in 4 ft	X	1.00	Std
Upper Deck	90° Neck	X	10.00	Feet
Deck Length	Main Deck Length	X	28.00	Feet
Frame Type	Channel Side Rails turned In	X	1.00	Std
Beavertail	Self Cleaning 5" x 3" Angle Iron Beavertail	X	5.00	Feet
Deck Type	6" Jr I-Beam Crossmembers, 16" on Center	X	1.00	Std
Deck Type	White Oak 2" Nom	X	1.00	Std
Ramps; Rear	5' x 20" Self Cleaning 5" X 3" Angle Iron, Spring Assisted	X	1.00	Pair
Appx Deck Height	59" Upper Deck, 35" Main Deck, Loaded	X	1.00	Inches
Width	102" OD	X	1.00	Inches
Tie Downs	D-Rings, 1" *** Straight **	X	16.00	Std
Brakes	Air, ABS 2S/1M, Meritor WABCO (Parking brakes on all axles)	X	1.00	Std
Axles	25K Oil Bath	X	3.00	Std
Suspension	49" Spread (Spring), 9700 Hutch	X	1.00	Std
Tires & Wheels	235/75R 17.5 J, 8 Bolt [17.5 x 6.75] Hub Pilot	X	12.00	Std
Hitch Type	Semi King Pin [S] with 18" Setback, 48" Height	X	1.00	Std
Jack	200,000# Twin 2 Speed, Holland Mark V (62,500 lb Lift Capacity)	X	1.00	Std
Plug	7 Pole Semi Socket	X	1.00	Std
Lights	LED Lights (Peterson), (3) lights per side Deck, (3) per side Tailboard, Sealed Wiring Harness (Sealco)	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Stripe Color	White	X	1.00	Std
Standard	Document Holder	X	1.00	Std



FELLING TRAILERS, INC.

1525 Main Street South, Sauk Centre, MN 563

Phone: 800-245-2809; FAX: 320-352-5230

Product Sheet

4500-A

www.felling.com

Standard	Ready for a 48" Chain Box on both sides, located behind dollies	X	1.00	Std
Standard	1 step standard in front of the first axle on drivers side	X	1.00	Std
Standard	Toolbox with Cover Recessed in Upper Deck	X	1.00	Std
GVWR	95,900 lbs	X	1.00	Std