



**FT-80-3 NN-LX**
**Semi - Narrow Neck**

|                  |                  |                    |                      |
|------------------|------------------|--------------------|----------------------|
| <b>GVWR LBS:</b> | <b>GAWR LBS:</b> | <b>WEIGHT LBS:</b> | <b>CAPACITY LBS:</b> |
| <b>92,500</b>    | <b>67,500</b>    | <b>12,500</b>      | <b>80,000</b>        |

- Swing Clearance is 84" Standard
- 48" King Pin height
- 18" King Pin set back
- Engineered, Cambered, Fabricated Main Beams

- 8" Structural channel side rails
- Pierced 6" I-Beam crossmembers on 16" centers
- Open Wheel Wells
- Mid-Ship Turn/Marker Lights

\* NOTE: Dealer must add 12% FET on retail price. Tax is to be calculated & remitted by dealer.

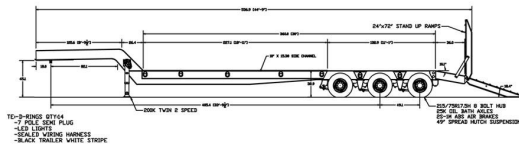

| Standard & Other Options | Description   | Std. Option | Std. Qty. | Unit   |
|--------------------------|---|-------------|-----------|--------|
| Load Capacity            | 80,000 lbs Distributed, 60,000 lbs in 16 ft                     | X           | 1.00      | std    |
| Gooseneck                | Narrow Neck Design, 84" Swing Clearance                         | X           | 11.00     | Feet   |
| Deck Length              | Main Deck Length to Open Wheels Trunnion                        | X           | 18.00     | Feet   |
| Frame Type               | Channel Side Rails turned out                                   | X           | 1.00      | Std    |
| Trunnion Length          | 49" Axle Spread, Open Wheel Trunnion                            | X           | 12.00     | Feet   |
| Beavertail               | Self Cleaning Angle Iron  | X           | 3.00      | Feet   |
| Deck Type                | 6" Jr I-Beam Crossmembers, 16" on Center                        | X           | 1.00      | Std    |
| Deck Type                | White Oak 2" Nom  | X           | 0.00      | Std    |
| Ramps; Rear              | 24" x 72" Stand Up Self Cleaning W/Spring Assist                | X           | 1.00      | Pair   |
| Appx Deck Height         | 32" Loaded, 34" Unloaded (Open Wheels)                          | X           | 1.00      | Inches |
| Width                    | 102" OD   | X           | 1.00      | Inches |
| Tie Downs                | D-Rings, 1" ** Bent **  | X           | 14.00     | Each   |
| Brakes                   | Air, ABS 2S/1M, Meritor WABCO (Parking brakes on all axles)     | X           | 1.00      | Std    |
| Axles                    | 25K Oil Bath  | X           | 3.00      | Std    |
| Suspension               | 49" Spread, 9700 Hutch  | X           | 1.00      | Std    |
| Tires & Wheels           | 235/75R 17.5 J, 8 Bolt [17.5 x 6.75] Hub Pilot                  | X           | 12.00     | Std    |
| Hitch Type               | Semi King Pin [S] with 18" Setback, 48" Height                  | X           | 1.00      | Std    |
| Jack                     | 200,000# Twin 2 Speed, Holland Mark V (62,500 lb Lift Capacity) | X           | 1.00      | Std    |
| Plug                     | 7 Pole Semi Socket  | X           | 1.00      | Std    |
| Lights                   | LED Lights (Peterson), Sealed Wiring Harness (Sealco)           | X           | 1.00      | Std    |
| Trailer Color            | Felling Black # CCA945378 (White Felling Decal)                 | X           | 1.00      | Std    |
| Stripe Color             | White   | X           | 1.00      | Std    |
| Standard                 | Document Holder   | X           | 1.00      | Std    |



**FELLING TRAILERS, INC.**

1525 Main Street South, Sauk Centre, MN 563  
Phone: 800-245-2809; FAX: 320-352-5230

*Product Sheet*

4500-A

[www.felling.com](http://www.felling.com)

|          |  |   |      |     |
|----------|--|---|------|-----|
| Standard | 1 step standard in front of the first axle on drivers side | X | 1.00 | Std |
| GVWR     | 92,500 lbs   | X | 1.00 | Std |