


XF-AG-80-3 HDG

X-Force AG Series

GVWR LBS:	GAWR LBS:	WEIGHT LBS:	CAPACITY LBS:
103,200	60,840	23,200	80,000

- King Pin height adjustable 45" - 51" (84" SC)
- 16" King Pin Set Back
- Pull Out Outriggers
- Drop In Tool Tray
- 7" Lift Cylinders (2)
- 5 Position Ride Height Cam Blocks
- Rear Bolsters with Swivel D-rings
- Engineered, Cambered, Fabricated 16" Main Beams and Side Beams, with T-1 Flanges

- 10" I-Beam crossmembers on 24" centers
 - Drop Center Cross Members in Rear Trunnion
 - Document Holder Standard
 - 4 Flag Holders
 - Mid-Ship Turn/Marker Lights
 - Hyd Couplers, 3/4" Pioneer, Male 6602-12-12, Female 6601-12-12
 - Pressure requirements, 3,000 PSI
- * NOTE: Dealer must add 12% FET on retail price. Tax is to be calculated & remitted by dealer.

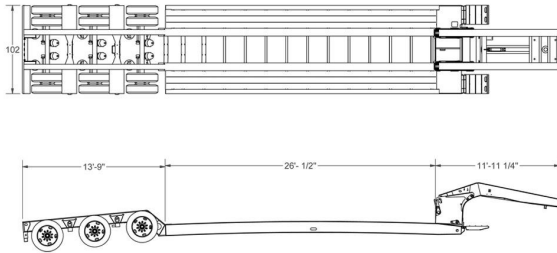

Shown with optional aluminum gooseneck fenders, winch & aluminum wheels

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Load Capacity	80,000 lbs Distributed, 60,000 lbs in 16 ft, 52,000 lbs in 10 ft	X	1.00	Std
Gooseneck	11' Hydraulic Detachable Gooseneck 84" Swing Clearance	X	11.00	Feet
Gooseneck, Acc	5 Position Ride Height Cam Blocks	X	1.00	Std
Gooseneck, Acc	Hydraulic Pressure Gauge, Liquid Filled, for supply line pressure	X	1.00	Opt
Gooseneck, Acc	Hydraulically Operated Center Neck Support Arm	X	1.00	Std
Ramps, Front	26" Front Fold Over Ramps	X	1.00	Pair
Deck Length	Main Deck Length (Usable Deck Length +/-)	X	24.00	Feet
Main Deck	Pull Out Side Extensions, 16" on center, 2 tubes per pullout, Extends up to 33", Aluminum Tube, with 2 piece aluminum outrigger approach ramps with ramps storage	X	1.00	Feet
Trunnion Length	45° Appx, Full Height Trunnion Approach, bolt on (Use with Wheel Covers)	X	1.00	Feet
Trunnion Length	49" Axle Spread, Trunnion Length in Feet	X	11.50	Feet
Rear Deck & Trunnion	Wheel Covers, Full Length Flat Top Modular (Bolt On, 2 piece), 20K Load Bearing	X	3.00	Axle
Deck Type	White Oak Full 2" (Outer Bays Only)	X	1.00	Std
Appx Deck Height	24" Loaded, 8" Ground Clearance	X	1.00	Inches
Width	102" OD	X	1.00	Inches
Tie Downs	D-Rings, 1"	X	14.00	Each
Brakes	Air, ABS 2S/1M, Meritor WABCO (Parking brakes on all axles)	X	1.00	Std
Axles	25K Oil Bath	X	3.00	Std
Suspension	Ridewell 240 with Dump Valve & Pressure Gauge	X	1.00	Std
Tires & Wheels	255/70R 22.5 H, 10 Bolt [22.5 x 8.25] Hub Pilot	X	12.00	Std
Hitch Type	Semi King Pin [S] with 16" Setback, 50" Height +/-	X	1.00	Std



FELLING TRAILERS, INC.

1525 Main Street South, Sauk Centre, MN 563

Phone: 800-245-2809 - www.felling.com

Product Sheet

4500-A

Plug	7 Pole Semi Socket	X	1.00	Std
Lights	LED Lights (Peterson), (1) per side Gooseneck, (3) lights per side Deck & Trunnion, (3) per side Tailboard, Sealed Wiring Harness (Sealco)	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Stripe Color	White	X	1.00	Std
Standard	Document Holder	X	1.00	Std
Standard	Plumbed for Wet Kit with Hyd Couplers, Pressure- 3/4" Pioneer, Male 6602-12-12, Ret urn- 3/4" Pioneer Female 6601-12-12 ** 3,000 PSI Required **	X	1.00	Std
GVWR	103,200 lbs	X	1.00	Std