

### XF-HD-110-3 HDG

### X-Force HD Series

#### GVWR LBS:

**129,000**

#### GAWR LBS:

**60,000**

#### WEIGHT LBS:

**19,000**


#### CAPACITY LBS:

**110,000**

- King Pin height adjustable 45" - 52" (96" SC)
- 16" King Pin Set Back
- Removable Outriggers
- Drop In Tool Tray
- 8" Lift Cylinders (2) up to 114 S/C
- 10" Lift Cylinders (2) on 168 S/C
- 4 Position Ride Height Cam Blocks
- Rear Bolsters with Swivel D-rings

- Engineered, Cambered, Fabricated 16" Main Beams and Side Beams, with T-1 Flanges
- 10" I-Beam crossmembers on 24" centers
- Drop Center Cross Members in Rear Trunnion
- Document Holder Standard
- 4 Flag Holders
- Mid-Ship Turn/Marker Lights
- Flip Axle Ready
- Pressure requirements; 3,000 PSI

\* NOTE: Dealer must add 12% FET on retail price. Tax is to be calculated & remitted by dealer.

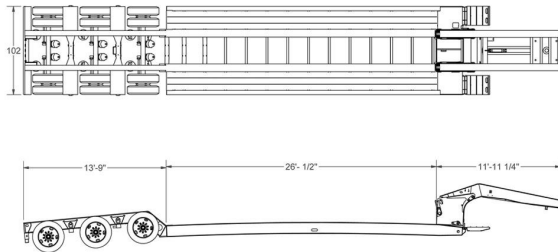

Shown with optional hyd. flip neck, & flip axle.

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Load Capacity	110,000 lbs in 12 ft	X	1.00	Std
Gooseneck	12' Hydraulic Detachable Gooseneck 96" Swing Clearance	X	12.00	Feet
Gooseneck, Acc	4 Position Ride Height Cam Blocks	X	1.00	Std
Gooseneck, Acc	Hydraulic Pressure Gauge, Liquid Filled, for supply line pressure	X	1.00	Opt
Gooseneck, Acc	Hydraulically Operated Center Neck Support Arm	X	1.00	Std
Ramps, Front	26" Front Fold Over Ramps	X	1.00	Pair
Deck Length	Main Deck Length (Usable Deck Length +/-)	X	24.00	Feet
Main Deck	Outriggers, 12" Heavy Duty Fabricated Swing Out, Removable	X	1.00	Feet
Main Deck	Pullout HD Outrigger at Front	X	1.00	Std
Main Deck	Side Rail Top Flange Reinforcement (Straight D-Rings ILO Bent)	X	1.00	Std
Trunnion Length	45° Appx, 10" Half Bolster Trunnion Approach	X	1.00	Feet
Trunnion Length	55" Axle Spread, Trunnion Length in Feet	X	13.00	Feet
Rear Deck & Trunnion	Stinger/Booster Reinforced Trunnion/ Main Frame (single axle only) or Flip Axle	X	1.00	Std
Deck Type	White Oak Full 2" (Outer Bays Only)	X	1.00	Std
Appx Deck Height	24" Loaded, 8" Ground Clearance	X	1.00	Inches
Width	102" OD	X	1.00	Inches
Tie Downs	D-Rings, 1"	X	14.00	Each
Brakes	Air, ABS 2S/1M, Meritor WABCO (Parking brakes on all axles)	X	1.00	Std
Axles	25K Oil Bath	X	3.00	Std
Suspension	Ridewell 240 with Dump Valve & Pressure Gauge	X	1.00	Std



**FELLING TRAILERS, INC.**

1525 Main Street South, Sauk Centre, MN 563  
 Phone: 800-245-2809 - www.felling.com

*Product Sheet*

4500-A

Tires & Wheels	275/70R 22.5 J, 10 Bolt [22.5 x 8.25] Hub Pilot	X	12.00	Std
Hitch Type	Semi King Pin [S] with 16" Setback, 50" Height +/-	X	1.00	Std
Plug	7 Pole Semi Socket	X	1.00	Std
Lights	LED Lights (Peterson), (1) per side Gooseneck, (3) lights per side Deck & Trunnion, (3) per side Tailboard, Sealed Wiring Harness (Sealco)	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Stripe Color	White	X	1.00	Std
Standard	Document Holder	X	1.00	Std
Standard	Drop In Storage Tray in Main Deck (1 Standard)	X	1.00	Std
Standard	Plumbed for Wet Kit with Hyd Couplers, Pressure- 3/4" Pioneer, Male 6602-12-12, Ret urn- 3/4" Pioneer Female 6601-12-12 ** 3,000 PSI Required **	X	1.00	Std
GVWR	129,000 lbs	X	1.00	Std