

XF-HD-120-3 HDG


X-Force HD Series

GVWR LBS:	GAWR LBS:	WEIGHT LBS:	CAPACITY LBS:
140,000	67,500	20,000	120,000

- King Pin height adjustable 45" - 53" (108" SC)
- 15" King Pin Set Back
- Removable Outriggers
- Drop In Tool Tray
- 8" Lift Cylinders (2) up to 114 S/C
- 10" Lift Cylinders (2) on 168 S/C
- 4 Position Ride Height Cam Blocks
- Rear Bolsters with Swivel D-rings

- Engineered, Cambered, Fabricated 16" Main Beams and Side Beams, with T-1 Flanges
- 10" I-Beam crossmembers on 24" centers
- Drop Center Cross Members in Rear Trunnion
- Document Holder Standard
- 4 Flag Holders
- Mid-Ship Turn/Marker Lights
- Stinger/ Flip Axle Ready (Tandem)
- Pressure requirements; 3,000 PSI

* NOTE: Dealer must add 12% FET on retail price.

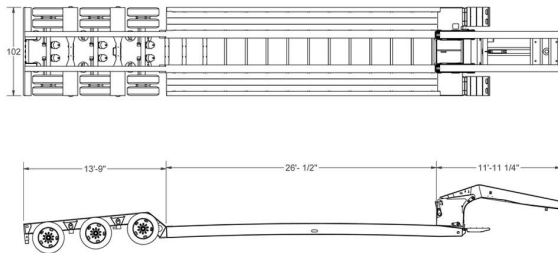

Shown with optional XF-Jeep 80-3, flip neck, outrigger boards w/hold downs & alum. wheels.

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Load Capacity	120,000 lbs in 12 ft	X	1.00	Std
Gooseneck	13' Hydraulic Detachable Gooseneck 108" Swing Clearance	X	13.00	Feet
Gooseneck, Acc	4 Position Ride Height Cam Blocks	X	1.00	Std
Gooseneck, Acc	Hydraulic Pressure Gauge, Liquid Filled, for supply line pressure	X	1.00	Opt
Gooseneck, Acc	Hydraulically Operated Center Neck Support Arm	X	1.00	Std
Ramps, Front	26" Front Fold Over Ramps	X	1.00	Pair
Deck Length	Main Deck Length (Usable Deck Length +/-)	X	24.00	Feet
Main Deck	Outriggers, 12" Heavy Duty Fabricated Swing Out, Removable	X	1.00	Feet
Main Deck	Pullout HD Outrigger at Front	X	1.00	Std
Main Deck	Side Rail Top Flange Reinforcement (Straight D-Rings ILO Bent)	X	1.00	Std
Trunnion Length	45° Appx, 10" Half Bolster Trunnion Approach	X	1.00	Feet
Trunnion Length	55" Axle Spread, Trunnion Length in Feet	X	13.00	Feet
Rear Deck & Trunnion	Stinger Reinforced Trunnion/ Main Frame (tandem axle) or Flip Axle	X	1.00	Std
Deck Type	White Oak Full 2" (Outer Bays Only)	X	1.00	Std
Appx Deck Height	24" Loaded, 8" Ground Clearance	X	1.00	Inches
Width	102" OD	X	1.00	Inches
Tie Downs	D-Rings, 1"	X	14.00	Each
Brakes	Air, ABS 2S/1M, Meritor WABCO (Parking brakes on all axles)	X	1.00	Std
Axles	25K Oil Bath	X	3.00	Std
Suspension	Ridewell 240 with Dump Valve & Pressure Gauge	X	1.00	Std



FELLING TRAILERS, INC.

1525 Main Street South, Sauk Centre, MN 563

Phone: 800-245-2809 - www.felling.com

Product Sheet

4500-A

Tires & Wheels	275/70R 22.5 J, 10 Bolt [22.5 x 8.25] Hub Pilot	X	12.00	Std
Hitch Type	Semi King Pin [S] with 15" Setback, 50" Height +/-	X	1.00	Std
Plug	7 Pole Semi Socket	X	1.00	Std
Lights	LED Lights (Peterson), (1) per side Gooseneck, (3) lights per side Deck & Trunion, (3) per side Tailboard, Sealed Wiring Harness (Sealco)	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Stripe Color	White	X	1.00	Std
Standard	Document Holder	X	1.00	Std
Standard	Drop In Storage Tray in Main Deck (1 Standard)	X	1.00	Std
Standard	Plumbed for Wet Kit with Hyd Couplers, Pressure- 3/4" Pioneer, Male 6602-12-12, Ret urn- 3/4" Pioneer Female 6601-12-12 ** 3,000 PSI Required **	X	1.00	Std
GVWR	140,000 lbs	X	1.00	Std