

FT-24-2 LP

Deckover Tags Low Pro

GVWR LBS:

30,500

GAWR LBS:

24,000


WEIGHT LBS:

6,800

CAPACITY LBS:

23,700

- Engineered, Cambered, Fabricated, 14" Main Beams
- 4" pierced High Tensile Jr I-Beam crossmembers 16" o center
- 7" Channel side rails, flat side out
- Tread Plate covered wheels
- * NOTE: Dealer must add 12% FET on retail price. Tax is to be calculated & remitted by dealer.

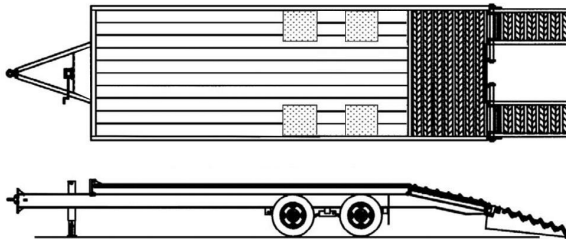

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Deck Length	Main Deck Length (Pierced Frame)	X	20.00	Feet
Beavertail	Self Cleaning 5" x 3" Angle Iron Beavertail	X	5.00	Feet
Deck Type	White Oak 2" Nom	X	1.00	Std
Ramps; Rear	5' x 20" Self Cleaning 5" X 3" Angle Iron Spring Assist	X	1.00	Pair
Appx Deck Height	33" Loaded, 35" Unloaded	X	1.00	Inches
Width	102" OD	X	1.00	Inches
Tie Downs	D-Rings, 1" ** Straight ** (One Set Centered on BVT)	X	10.00	Each
Brakes	Electric, Dexter FSA (Fwd Self Adj) On All Axles	X	1.00	Std
Axles	12K Dexter Oil Bath	X	2.00	Std
Suspension	Dexter Spring	X	1.00	Std
Tires & Wheels	ST235/80R 16 E, 8 Bolt [16 x 6] Hub Pilot	X	8.00	Std
Hitch Length	Center of Coupler to Headboard, Appx	X	5.30	Feet
Hitch Type	3" Adjustable Lunette Eye/Pintle, [C] 66,000 lb Plate Mount (3/4" Bolt)	X	1.00	Std
Jack	12K Drop Leg Spring Foot ** Side Wind **	X	1.00	Std
Plug	7 Pole RV	X	1.00	Std
Lights	LED Lights (Peterson), Sealed Wiring Harness (Sealco)	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Stripe Color	White	X	1.00	Std
Standard	1/2" Safety Chains, Grade 70	X	1.00	Std
Standard	2 Steps, 1 on the Standard Hitch and 1 in front of Axles on Roadside	X	2.00	Std
Standard	Document Holder	X	1.00	Std
Standard	Tool Box, with Lockable Cover	X	1.00	Std
GVWR	30,500 lbs	X	1.00	Std