

### FT-10 I

### DD I Series

#### GVWR LBS:

**9,980**

#### GAWR LBS:

**14,000**


#### WEIGHT LBS:

**2,980**

#### CAPACITY LBS:

**7,000**

- 6x12# I-beam Main Frame
- 3" (80K) Jr I-beam crossmembers
- 18" on center

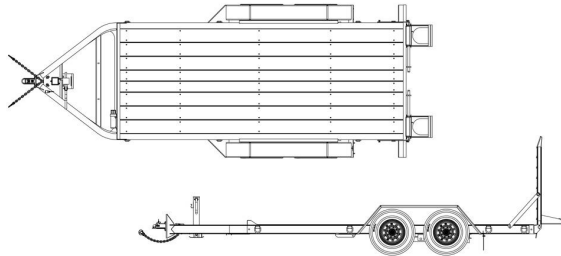

• Shown with optional toolbox & conspicuity tape

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Deck Length	Main Deck Length	X	16.00	Feet
Deck Type	Pressure Treated Wood	X	1.00	Std
Ramps; Rear	5' x 16" Angle Iron Spring Assist	X	1.00	Pair
Ramps, Acc	Full Width Ramp Rod	X	1.00	Std
Appx Deck Height	19" Loaded, 21.5" Unloaded	X	1.00	Inches
Width	102" OD, 82" ID	X	1.00	Inches
Tie Downs	D-Rings, 5/8" Straight	X	8.00	Std
Brakes	Electric, Dexter FSA (Fwd Self Adj) On All Axles	X	1.00	Std
Axles	7K Dexter, Drop	X	2.00	Std
Axles, Acc	Dexter EZ-Lube Hubs	X	1.00	Std
Suspension	Dexter Spring, 36" Spread	X	1.00	Std
Tires & Wheels	ST235/80R 16 E, 8 Bolt [16 x 6] White Mod	X	4.00	Std
Hitch Length	Center of Coupler to Headboard	X	5.00	Feet
Hitch Type	2 5/16" Ball Adjustable, [B] 21,000 lb Plate Mount	X	1.00	Std
Hitch Height	Approximate Adjustment Hitch Range 13.5" to 22.5" (18" to 22.5" if Hyd)	X	1.00	Std
Jack	12K Drop Leg Spring Foot ** Side Wind **	X	1.00	Std
Plug	7 Pole RV	X	1.00	Std
Lights	4 Tail Light System, LED, Sealed Wiring Harness	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Standard	3/8" Safety Chains, Grade 70	X	1.00	Std
Standard	Document Holder	X	1.00	Std
Standard	No Conspicuity Tape	X	1.00	Std
GVWR	9,980 lbs	X	1.00	Std