

FT-30-3 I-S DS

DD I DS

GVWR LBS:

33,850

- W8 x 18 # I-beam Main Frame
- 4" (80K) Jr I-beam crossmembers
- 18" on center

GAWR LBS:

30,000


WEIGHT LBS:

6,850

- 11° Beavertail load angle
- 15° Ramp load angle

CAPACITY LBS:

27,000

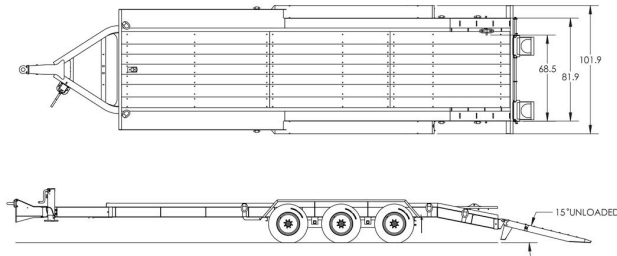

- Shown with optional Drill Kit installed and large toolbox

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Load Capacity	27,000 lbs Distributed	X	1.00	Std
Frame Type	3" Angle Iron Lip Up	X	1.00	Std
Frame Type	7" Deck Lip Extension Both Sides of Trailer, Ahead of Fenders	X	1.00	Std
Deck Length	Main Deck Length	X	22.00	Feet
Dovetail	Dovetail Length - Wood Inlay	X	4.00	Feet
Dovetail, Acc	(8) 1/2" x 1/2" x 4" Grouser Bars staggered on the outer angle iron and frame rail on each side of the Dovetail	X	8.00	Each
Deck Type	White Oak 2" Nom	X	1.00	Std
Ramps; Rear	6' x 16" Angle Iron Spring Assist	X	1.00	Pair
Ramps, Acc	Mount Ramps to Road Side ramps to measure 68" from outside of ramp to ramp with Hold-Up Anchor in Floor and Full Width Ramp Rod	X	1.00	Std
Appx Deck Height	28" Loaded, 30" Unloaded (Spring)	X	1.00	Inches
Width	102" OD, 82" ID	X	1.00	Inches
Tie Downs	D-Rings, 1" Straight (2) 45° top of deck in corners, (2) front of fenders, (2) rear of deck, (2) 1/2 way on BVT - 5/8" (1) cent. on front of deck, (1) offset on BVT deck	X	10.00	Std
Brakes	Electric, Dexter FSA (Fwd Self Adj) On All Axles	X	1.00	Std
Axles	10K Dexter Oil Bath (Single Wheel)	X	3.00	Std
Suspension	Dexter Spring, 42" Spread	X	1.00	Std
Tires & Wheels	235/75R 17.5 J, 8 Bolt [17.5 x 6.75] Plate Wheel	X	6.00	Std
Hitch Length	Fixed 1.5' fabricated extension on a standard 5' A-Frame, adj. pintle approx. 18" to 3 middle position approx. 23"	X	6.50	Feet
Hitch Type	3" Adjustable Lunette Eye/Pintle, [C] 50,000 lb Plate Mount (5/8" Bolt)	X	1.00	Opt
Jack	20K Spring loaded with a drop leg- single speed, outside of tongue road side, jack plate to pintle clearance aprox 30" , clockwise to extend	X	1.00	Std
Plug	7 Pole RV	X	1.00	Std

**FELLING TRAILERS, INC.**

1525 Main Street South, Sauk Centre, MN 563
Phone: 800-245-2809 - www.felling.com

Product Sheet

4500-A

Lights	4 tail light system, LED, Sealed Wiring Harness	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Standard	1/2" Safety Chains, Grade 70	X	1.00	Std
Standard	Center Fender Braces - From Outer Edge of the Fender Down to the Frame	X	2.00	Pair
Standard	Document Holder	X	1.00	Std
Standard	Drill Kit Ready - Steel Mounting Strips Under Deck To Mount Tank	X	1.00	Std
GVWR	33,850 lbs	X	1.00	Std