


### FT-60-3 LP

### Deckover Tags Low Pro

<b>GVWR LBS:</b>	<b>GAWR LBS:</b>	<b>WEIGHT LBS:</b>	<b>CAPACITY LBS:</b>
<b>71,400</b>	<b>60,840</b>	<b>11,400</b>	<b>60,000</b>

- Engineered, Cambered, Fabricated, 17" Main Beams
  - 4" pierced High Tensile Jr I-Beam crossmembers approx 16" on center
  - 7" channel side rails, flat side out
  - Tread Plate covered wheels
- \* NOTE: Dealer must add 12% FET on retail price. Tax is to be calculated & remitted by dealer.

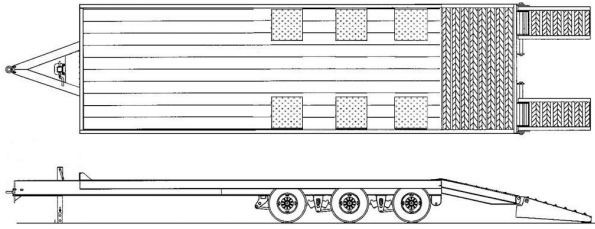

- Shown with optional Upright Air Ramps, 140,000 Twin 2-speed Jacks, Custom Toolbox and paint.

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Deck Length	Main Deck Length (Pierced Frame)	X	24.00	Feet
Frame Type	Engineered Fabricated Hi-Tensile Grade 80 Main Frame Beams with Grade 80 Jr-I Cross-Members	X	1.00	Std
Beavertail	Self Cleaning 5" x 3" Angle Iron Beavertail	X	6.00	Feet
Deck Type	White Oak 2" Nom	X	1.00	Std
Ramps; Rear	5' x 20" Self Cleaning 5" X 3" Angle Iron Spring Assist	X	1.00	Pair
Appx Deck Height	41" Loaded, 43 Unloaded	X	1.00	Inches
Width	102" OD	X	1.00	Inches
Tie Downs	D-Rings, 1" *** Straight ** (One Set Centered on BVT)	X	16.00	Each
Brakes	Air, ABS 2S/1M, Meritor WABCO (Parking brakes on all axles)	X	1.00	Std
Axles	25K Oil Bath	X	3.00	Std
Suspension	49" Spread (Spring), 9700 Hutch	X	1.00	Std
Tires & Wheels	255/70R 22.5 H, 10 Bolt [22.5 x 8.25] Hub Pilot	X	12.00	Std
Hitch Length	Center of Coupler to Headboard, Appx	X	5.30	Feet
Hitch Type	3" Adjustable 90K Pintle (7/8" Gr 8 Bolts) [C]	X	1.00	Std
Jack	25K 2 Speed Drop Leg	X	1.00	Std
Plug	7 Pole Semi	X	1.00	Std
Lights	LED Lights (Peterson), Sealed Wiring Harness (Sealco)	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Stripe Color	White	X	1.00	Std
Standard	2 Steps, 1 on the Standard Hitch and 1 in front of Axles on Roadside	X	2.00	Std
Standard	5/8" Safety Chains, Grade 80	X	1.00	Std
Standard	Document Holder	X	1.00	Std



**FELLING TRAILERS, INC.**

1525 Main Street South, Sauk Centre, MN 563  
Phone: 800-245-2809; FAX: 320-352-5230

*Product Sheet*

4500-A

[www.felling.com](http://www.felling.com)

Standard	Tool Box, with Lockable Cover	X	1.00	Std
GVWR	71,400 lbs	X	1.00	Std